

# 4700 Specifications

Unless otherwise noted, specifications are for configurations with internal radio modem.

## STANDARD FEATURES

- RTCM Version 2 input
- NMEA-0183 output
- Internal memory
- RTK/OTF

## TECHNICAL SPECIFICATIONS

### Physical

**Size:** 11.9 cm (4.7") W x 6.6 cm (2.6") H x 20.8 cm (8.2") L  
**Receiver weight:** 1.2 kg (2.7 lbs) including internal radio  
 6.8 kg (15 lbs) as full RTK rover

### Electrical

**Receiver power:** 4.5 Watts receiver only  
 6 Watts as full RTK rover  
 10.5 to 24 VDC  
**Battery life (typical):** >8 hours as full RTK rover including internal radio and TSC1, with 2 camcorder batteries  
**Certification:** FCC & CE mark approved

### Environmental

**Operating temp:** -40°C to +65°C (-40°F to +149°F)  
**Storage temp:** -40°C to +75°C (-40°F to +167°F)  
**Humidity:** 100% fully sealed. Weatherproof  
**Shock:** 1 m (3ft) accidental drop onto concrete

## PERFORMANCE SPECIFICATIONS

### Static Survey Performance

**Modes:** Quick-start, Static survey, FastStatic survey  
**Accuracy:**  
**Horizontal:** ±5mm + 0.5ppm  
**Vertical:** ±5mm + 1ppm  
**Azimuth:** ±1 arc second + 5/baseline length in kilometers

### Kinematic Survey Performance (Postprocessed)

(Requires TSC1™ data collector with Trimble Survey Controller™ software at rover.)

**Modes:** Continuous, Stop & go  
**Accuracy:**  
**Horizontal:** ±1 cm + 1 ppm  
**Vertical:** ±2cm + 1 ppm  
**Occupation:**  
**Continuous:** 1 measurement  
**Stop & go:** 2 epochs (min) with 5 satellites  
**Fastest datalogging rate:** 5Hz

### Real-time Survey Performance

**Modes:** Real-time Kinematic (RTK),  
 Real-time Differential (DGPS)  
**Real-time DGPS accuracy:** 0.2m + 1 ppm RMS  

RTK accuracy:	Mode	Latency	Accuracy
<b>Horizontal:</b>	1 Hz fine	0.4 second	±1cm + 1ppm
	5Hz fine	0.1 second	±3cm + 2ppm
<b>Vertical:</b>	1 Hz fine	0.4 second	±2cm + 1ppm
	5Hz fine	0.1 second	±5cm + 2ppm

**Range:** Range varies depending on radios used, local terrain and operating conditions. Multiple radio repeaters may be used to extend range, depending on type used.

### Initialization

**Mode:** Automatic while stationary  
 Automatic while moving on the fly (OTF)  
**Time:** < 1 minute (typical)  
 < 10 seconds (typical for known points or RTK initializer)  
 > 99.9%

**Reliability:**  
*Performance criteria are a function of the number of satellites visible, occupation time, observation conditions, obstructions, baseline length and environmental effects, and are based on favorable atmospheric conditions. Assumes five satellites (minimum) tracked continuously with the recommended antenna using the recommended static surveying procedures utilizing L1 and L2 signals at all sites; precise ephemerides and meteorological data may be required. Performance specifications are RMS and ppm values are times baseline length.*

### General Performance

**Start-up:** < 30 seconds from power on to start survey with recent ephemeris  
**Measurements:** L1 C/A code, L1/L2 full cycle carrier  
 Fully operational during P-code encryption  
**Number of channels:** Total Station: 18      CORS: 24  
**Datalogging:** In internal memory; in TSC1 data collector; or on TSC1 optional removable PC card  
**Receiver data storage:** 120 hours internal memory of L1/L2 data, 6 satellites, 15 second interval  
 Unlimited data storage using optional TSC1 and PC data card

### Internal Receive only Radio Modem Performance

(Requires internal radio modem)

**Modes:** High gain UHF  
**Range:**  

Base Radio Modem	
TRIMTALK™ 450S	TRIMMARK™ IIe
<b>Optimal:</b> 10km	15 km
<b>Typical:</b> 3-5km	10-12km

*Varies with terrain and operating conditions. Repeaters may be used to extend range depending on type of radios used.*

### Radio Modem:

**Freq. range:** 410-420 MHz, 430-440MHz, 440-450MHz, 450-460 MHz or 460-470 MHz  
 (only one per model)  
**Channels:** Up to 20 (factory pre-set)  
**Channel spacing:** 12.5 KHz or 25KHz (only one per system)  
**Wireless data rates:** 4800 and 9600bps  
**Modulation:** GMSK

*Broadcast frequency, transmit power, channel spacing and antenna gain are regulated by country-of-use. These are unique on a per country basis. The broadcast frequencies, channel spacing and country-of-use for the radio modem must be specified at time of order. Contact your Trimble representative for further information.*

## OPTIONS AND ACCESSORIES

**Survey options:** Rover backpack, 2 m Rangepole  
**Datalogging options:** TSC1 data collector with Trimble Survey Controller software  
 4 or 10 Mb PC cards for TSC1  
**Receiver firmware options:** RTCM SC-104 output Version 2  
 Internal radio modem  
 Event marker input  
 1 PPS output  
**Batteries:** 6 Ah sealed lead acid, 2.3 Ah camcorder battery  
**Support:** Extended hardware warranty  
 Firmware and software update agreements  
 Training on-site or at factory  
**Software:** Trimble Geomatics Office - *The total GPS and conventional survey data processing solution.*

## ORDERING INFORMATION


For further information please contact your nearest Trimble Authorized Distributor or Trimble Office. You may also visit our website at <http://www.trimble.com>.



Trimble Navigation Limited  
 Corporate Headquarters  
 645 North Mary Avenue  
 Sunnyvale, CA 94086  
 +1-408-481-8940  
 +1-408-481-7744 Fax  
[www.trimble.com](http://www.trimble.com)

Trimble Navigation Europe Limited  
 Trimble House  
 Meridian Office Park  
 Osborne Way  
 Hook, Hampshire RG27 9HX U.K.  
 +44 1256-760-150  
 +44 1256-760-148 Fax

Trimble Navigation  
 Singapore PTE Limited  
 79 Anson Road, #05-02  
 Singapore 079906  
 SINGAPORE  
 +65-325-5668  
 +65-225-9989 Fax

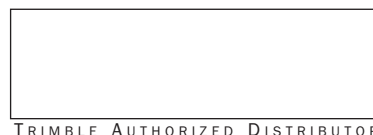

© 1999 Trimble Navigation Limited. All rights reserved. The Trimble logo with Trimble is a trademark of Trimble Navigation Limited registered in the United States Patent and Trademark Office. Super-trak, Trimble Geomatics Office, Trimble Survey Controller, TRIMTALK, TRIMMARK, and TSC1 are trademarks of Trimble Navigation Limited. All other marks are property of their respective owners. TID11540B (10/99)